


Stationary concrete pump

BSA 2110 HP D

Output up to 102 m³/h
Delivery pressure up to 220 bar

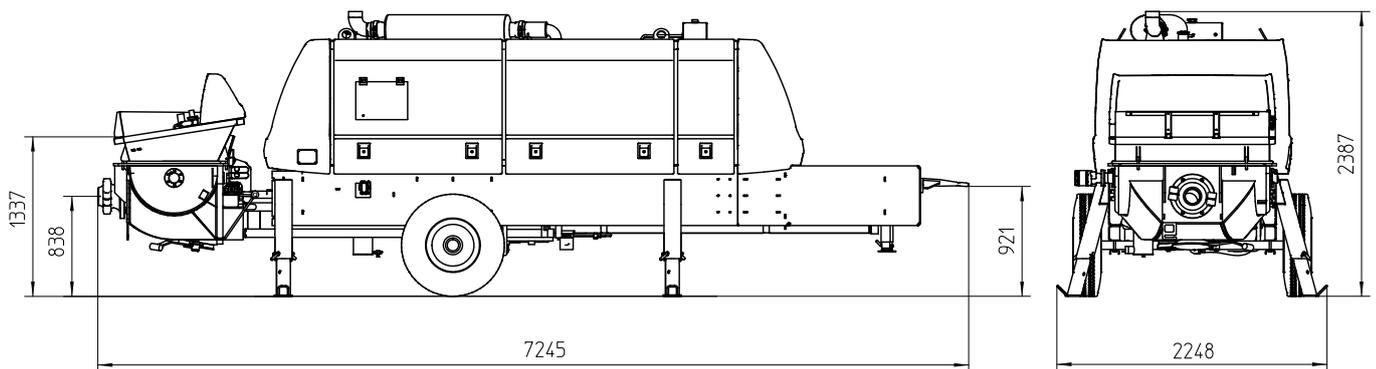

Note: Standard version BSA 2110 HP D. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Type		BSA 2110 HP D
Material number		102415.000
Output	m ³ /h	102 / 70 *
Delivery pressure	bar	150 / 220 *
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	2100
Strokes / minute		26 / 18 *
Engine / motor power	kW	330
Hopper		RS 905 HF
Capacity	l	approx. 600
Filling height	m	approx. 1.3
Transfer tube		S 1812 D
line connection	mm	ZX 125
Pressure connection	"	8
Control system		EPS FFH
Weight	kg	8800

* Values for hydraulic fluid being fed to piston-side
All data maximum theoretical

Serial equipment

Agitator safety switch off	Flushing water pump 1
Cable remote control 10 m	60 l/min 25 bar
Central lubrication on hopper with hand lever press	Gate valve connection
Cleaning accessories	Grill 60 mm
Coloring: Pump, frame, roof, tank and hood anthracite-grey Cover chrome yellow	Hard metal wear parts
Concrete hopper with agitator	Operating manuals (1× paper, 1× CD-ROM) spare part list
Concrete output adjust	Outriggers 4× mech.
Concrete pressure adjust	Pump flow meter
Coupling ring (DIN)	Set-up foot mech.
Drive diesel, Deutz 330 kW	Speed drawdown automatically on pump stop
Electronic error management	Splash guard
Ergonic Graphic Display (EGD)	Tool set incl. standard equipment
	Trailer F8, travelling in site

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.